

NEXIS CLICK-ON 22

110° hinge



- 110° opening angle
- Compatible with Soft-close
- With shallow cup depth (11 mm), also suitable for soft-formed doors
- 3-dimensional adjustment with corresponding mounting plate

Available in two versions:

- With self-closing mechanism (spring)
- Without self-closing mechanism (spring) for the use of Tipmatic

ORDER INFORMATION

Door overlay		Material		Cranking	With spring	Art. No.	
		Cup	Arm			Click-on for screw fitting	Click-on for press fitting
Full overlay		Steel, nickel-plated	Steel, nickel-plated	0	■	F015072811	F015072810
					-	F015072816	-
Half overlay		Steel, nickel-plated	Steel, nickel-plated	8	■	F015072818	-
					-	-	-

COVER CAPS

	Designation	Cranking	Imprinted/embossed	Art. No.
	Hinge arm cover cap, steel, short, nickel-plated, not imprinted, compatible with Soft-close	0	On request	F069073570
	Hinge arm cover cap, steel, open, nickel-plated, not imprinted, compatible with Soft-close	8	On request	F069073669

ACCESSORIES

	Designation	Art. No.		Designation	Art. No.
	Hinge cup cover cap, steel, nickel-plated, not imprinted	F069073687		Tipmatic Pin for wooden and aluminium frame doors, platinum grey	F069135396
	Soft-close Click-on adapter	F069073715		Tipmatic Plus Pin for handle-free furniture doors, light grey	F069135061

PAGE REFERENCES

Nexis Click-on mounting plates	172	Soft-close Click-on	186	Assembly aids	654
Accessories	180	Tipmatic	194		
Technical information	182	Assembly technology	637		

PLANNING DIMENSIONS

All dimensions in millimetres

Full overlay		K0	Half overlay		K8	
Door overlay	Cup distance					
	0	3	4	5	6	7
	20					0
	19				0	
	18			0	2	
	17		0		2	3
	16	0		2	3	4
	15		2	3	4	
	14	2	3	4		
	13	3	4			
12	4					
Mounting plate height						
Door overlay	Cup distance					
	8	3	4	5	6	7
	12					0
	11				0	
	10			0	2	
	9		0		2	3
	8	0		2	3	4
	7		2	3	4	
	6	2	3	4		
	5	3	4			
4	4					
Mounting plate height						

MINIMUM GAP

Door thickness	Cup distance					
	3	4	5	6	7	
16	0.5	0.6	1.6	2.6	3.6	
18	0.5	1.2	2.2	3.2	4.2	
19	0.5	1.5	2.5	3.5	4.5	
20	0.8	1.8	2.8	3.8	4.8	
22	1.4	2.4	3.4	4.4	5.4	
Minimum gap						

MINIMUM REVEAL

Door thickness	Cup distance					
	3	4	5	6	7	
16	0.5	0.5	0.5	0.5	0.5	
18	1.0	1.0	1.0	1.0	1.0	
19	1.2	1.2	1.2	1.2	1.2	
20	2.2	1.5	1.5	1.5	1.5	
22	4.7	3.7	2.8	2.1	2.1	
Minimum reveal (F)						

NOTES



The minimum gap is the clearance required between the front edge of the cabinet and the closed door so that the door can be opened without hindrance.

Important: Reveals were determined with a (door) edge radius of 1 mm.


Hinge dimensions and reveal calculation with factory setting.

We recommend a trial fitting.

DRILLING PATTERNS

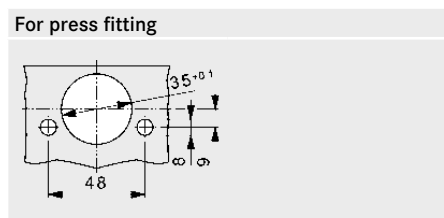
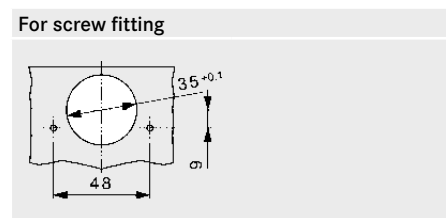


CUP DIMENSIONS

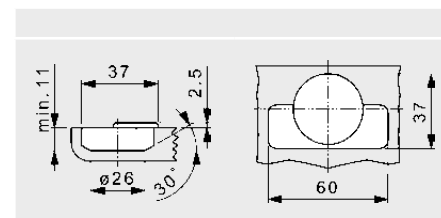

NEXIS IMPRESSO/CLICK-ON

Mounting plates

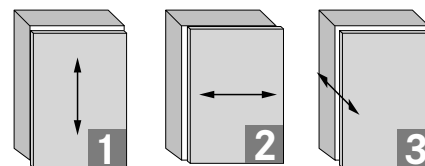

Height adjustment
+/- 2 mm



Side adjustment
+1/-3 mm

Depth adjustment
+3/-1 mm



All adjustments can be carried out independently of each other.



ORDER INFORMATION

2D CROSS MOUNTING PLATE, 3-POINT FIXING

For screw fitting	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel/zamak, nickel-plated Fixing with wood screws Mounting distance 37 mm Hole spacing 32 mm Height and depth adjustment via cam 		0	F06 1073214
		2	F06 1073215
		4	F06 1073216
		6	F06 1073217
		8	F06 1073218

2D CROSS MOUNTING PLATE, 3-POINT FIXING

With pre-assembled Euro screws	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel/zamak, nickel-plated Fixing with pre-assembled Euro screws Mounting distance 37 mm Hole spacing 32 mm Height and depth adjustment via cam 		0	F06 1073232
		2	F06 1073233

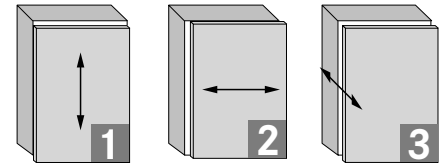

Height adjustment
+/- 2 mm

Side adjustment
+1/-3 mm

Depth adjustment
+3/-1 mm

All adjustments can be carried out independently of each other.

ORDER INFORMATION

2D CROSS MOUNTING PLATE, 2-POINT FIXING

For screw fitting	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel/zamak, nickel-plated Fixing with wood screws Mounting distance 37 mm Hole spacing 32 mm Height and depth adjustment via cam 		0	F06 1073253
		2	F06 1073254
		4	F06 1073255
		6	F06 1073222
		8	F06 1073223

2D CROSS MOUNTING PLATE, 2-POINT FIXING



For Euro screws	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel/zamak, nickel-plated Fixing with Euro screws Mounting distance 37 mm Hole spacing 32 mm Height and depth adjustment via cam 		0	F06 1073227
		4	F06 1073229

2D CROSS MOUNTING PLATE, 2-POINT FIXING

With pre-assembled Euro screws	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel/zamak, nickel-plated Fixing with pre-assembled Euro screws Mounting distance 37 mm Hole spacing 32 mm Height and depth adjustment via cam 		0	F06 1073236
		2	F06 1073237
		4	F06 1073238
		6	F06 1073239
		8	F06 1073240

NEXIS IMPRESSO/CLICK-ON

Mounting plates

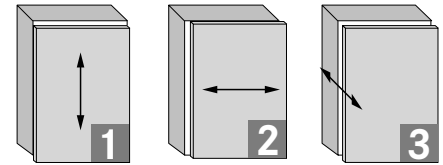

Height adjustment
+/- 2 mm

Side adjustment
+1/-3 mm

Depth adjustment
+3/-1 mm

All adjustments can be carried out independently of each other.

ORDER INFORMATION

2-PART CROSS MOUNTING PLATE, 3-POINT FIXING



For screw fitting	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel/zamak, nickel-plated Fixing with wood screws Mounting distance 37 mm Hole spacing 32 mm 		0	F060073148
		2	F060073150
		4	F060073151
		8	F060073152
		18	F060073153

2-PART CROSS MOUNTING PLATE, 3-POINT FIXING

For Euro screws	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel/zamak, nickel-plated Fixing with Euro screws Mounting distance 37 mm Hole spacing 32 mm 		0	F060073156
		2	F060073157
		4	F060073158
		8	F060073159

2-PART CROSS MOUNTING PLATE, 3-POINT FIXING

With pre-assembled Euro screws	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel/zamak, nickel-plated Fixing with pre-assembled Euro screws Mounting distance 37 mm Hole spacing 32 mm 		2	F060073172
		4	F060073173
		8	F060073174
		18	F060073175

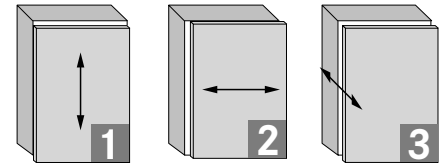

Height adjustment
+/- 2 mm

Side adjustment
+1/-3 mm

Depth adjustment
+3/-1 mm

All adjustments can be carried out independently of each other.

ORDER INFORMATION

1-PART CROSS MOUNTING PLATE, 2-POINT FIXING

For screw fitting	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel, nickel-plated Fixing with wood screws Mounting distance 37 mm Hole spacing 32 mm Height adjustment by means of slot 		0	F060073144
		2	F060073145
		3	F060073209
		4	F060073146

1-PART CROSS MOUNTING PLATE, 2-POINT FIXING



With pre-assembled Euro screws	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel, nickel-plated Fixing with pre-assembled 13.5 mm long Euro screws Mounting distance 37 mm Hole spacing 32 mm Height adjustment by means of slot 		0	F060073179
		2	F060073180
		4	F060073181

1-PART CROSS MOUNTING PLATE, 2-POINT FIXING FOR TWIN APPLICATION

With pre-assembled Euro screws	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel, nickel-plated Fixing with pre-assembled 10.5 mm long Euro screws Mounting distance 37 mm Hole spacing 32 mm Height adjustment by means of slot For twin application 		2	F060073202

NEXIS IMPRESSO/CLICK-ON

Mounting plates

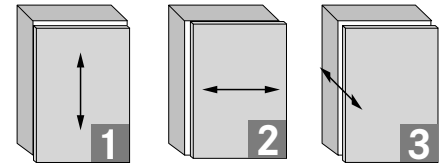

Height adjustment
+/- 2 mm



Side adjustment
+1/-3 mm

Depth adjustment
+3/-1 mm



All adjustments can be carried out independently of each other.



ORDER INFORMATION

1-PART CROSS MOUNTING PLATE, 3-POINT FIXING

With expansion dowel	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel, nickel-plated Fixing with 5 mm expansion dowels Mounting distance 37 mm Hole spacing 32 mm Height adjustment by means of slot  <p>ⓘ Plate must not be screwed on using a cordless screwdriver.</p>		0	F060073185
		2	F060073186
		4	F060073187

1-PART CROSS MOUNTING PLATE, 2-POINT FIXING

With expansion dowel bridge	37/32	Height	Art. No.
<ul style="list-style-type: none"> Steel, nickel-plated Fixing with 5 mm expansion dowel bridge Mounting distance 37 mm Hole spacing 32 mm Height adjustment by means of slot 		2	F060073183

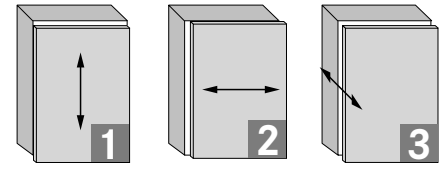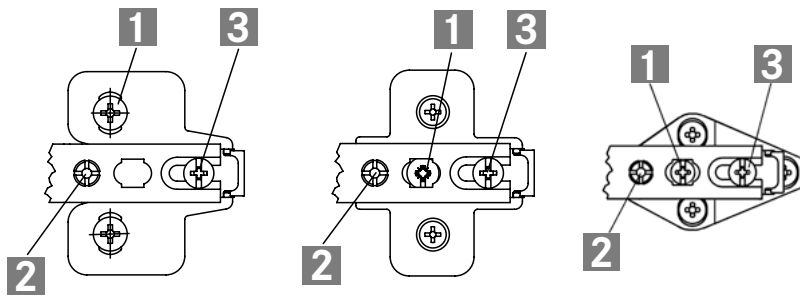

Height adjustment
+/- 2 mm



Side adjustment
+1/-3 mm

Depth adjustment
+3/-1 mm



All adjustments can be carried out independently of each other.

ORDER INFORMATION



1-PART MOUNTING PLATE, 2-POINT FIXING, MOUNTING DISTANCE 28 MM

For screw fitting	28/32	Height	Art. No.
<ul style="list-style-type: none"> Steel, nickel-plated Fixing with wood screws Mounting distance 28 mm Hole spacing 32 mm Height adjustment by means of slot 		2	F060073140



1-PART MOUNTING PLATE, 2-POINT FIXING, MOUNTING DISTANCE 28 MM

With pre-assembled Euro screws	28/32	Height	Art. No.
<ul style="list-style-type: none"> Steel, nickel-plated Fixing with pre-assembled Euro screws Mounting distance 28 mm Hole spacing 32 mm Height adjustment by means of slot 		0	F060073162
		2	F060073163
		4	F060073164

2-PART MOUNTING PLATE, 2-POINT FIXING, MOUNTING DISTANCE 28 MM

For Euro screws	28/32	Height	Art. No.
<ul style="list-style-type: none"> Steel/zamak, nickel-plated Fixing with Euro screws Mounting distance 28 mm Hole spacing 32 mm Height adjustment 		2	F060073154

1-PART MOUNTING PLATE, 2-POINT FIXING, MOUNTING DISTANCE 37 MM, HOLE SPACING 25 MM

For Euro screws	37/25	Height	Art. No.
<ul style="list-style-type: none"> Zamak, nickel-plated Fixing with Euro screws Mounting distance 37 mm Hole spacing 25 mm Height adjustment 		2	F061073268

1

2

3

4

5

6

7

8